


THAI SOKEN CO.,LTD.
WE PROVIDE LABOR SAVING AND SAFETY

WE PROVIDE LABOR SAVING AND SAFETY
THAI SOKEN CO.,LTD.

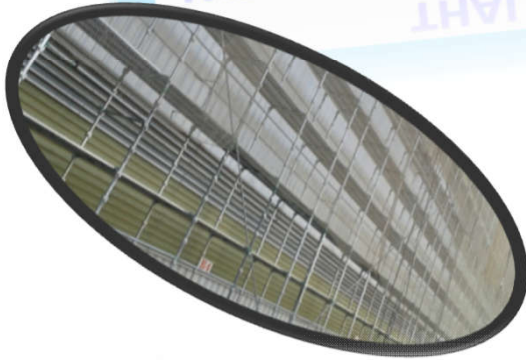

Head office

SSP TOWER 555/31 14Floor,Soi Sukhumvit 63(Ekamai),Klongton Nue,Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502


Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998




THAI SOKEN CO.,LTD.


Catwalk

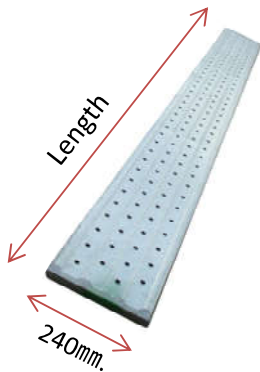

Size 240mm.	
Length	Weight
2000 mm.	8.1 kg.
3000 mm.	12.1 kg.
4000 mm.	16.2 kg.

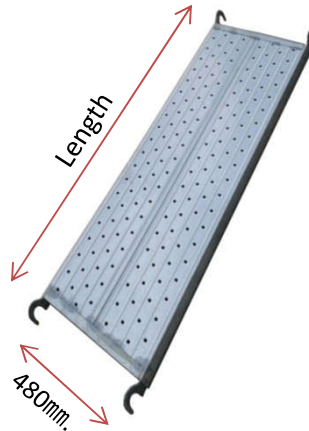


Size 480mm.	
Length	Weight
600 mm.	5.0 kg.
900 mm.	7.2 kg.
1200 mm.	9.6 kg.
1500 mm.	12.0 kg.
1800 mm.	14.3 kg.

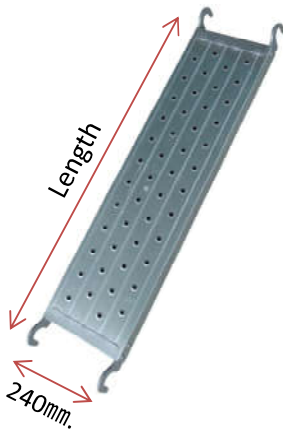


Size 240mm.	
Length	Weight
600 mm.	3.6 kg.
900 mm.	4.0 kg.
1200 mm.	5.5 kg.
1500 mm.	6.2 kg.
1800 mm.	7.4 kg.

Sujikai 1800(brace)

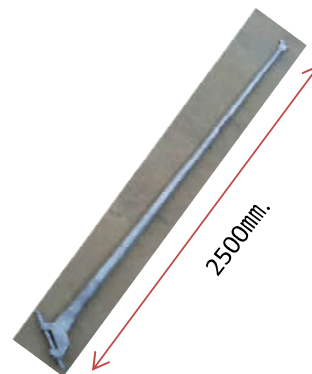

Kaidan(staris)

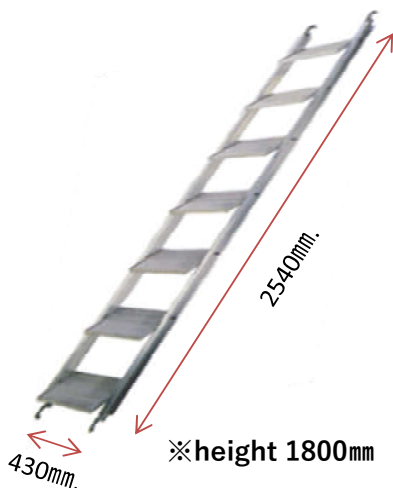

※height 1800mm

อุปกรณ์ของเราจะมีความแข็งแรงทนทาน
อายุการใช้งานก็จะนานกว่าที่อื่นที่ใช่กัน
ทั่วไป ซึ่งวิธีการผลิตจะใช้วิธีทาสี แต่ทาง
บริษัทไทยโซเคนของเราจะใช้กรรมวิธีชุบ
กัลวาไนซ์ อาจจะแพงกว่าแต่ก็คุ้มค่า

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998




THAI SOKEN CO.,LTD.

SHICHU




Size	
Length	Weight
450 mm.	1.9 kg.
725 mm.	3.5 kg.
900 mm.	3.9 kg.
1800 mm.	6.6 kg.
2250 mm.	8.0 kg.
2700 mm.	9.7 kg.
3600 mm.	12.7 kg.

STK stantion

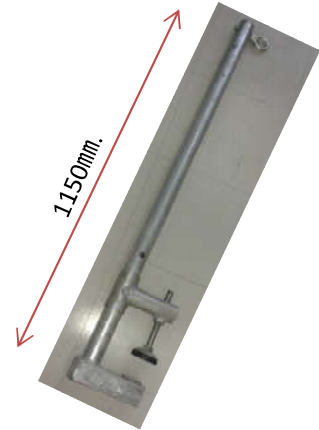


※Slab thickness 50mm~200mm

TESURI



Size	
Length	Weight
600 mm.	1.7 kg.
900 mm.	2.4 kg.
1200 mm.	3.0 kg.
1500 mm.	3.8 kg.
1800 mm.	4.6 kg.

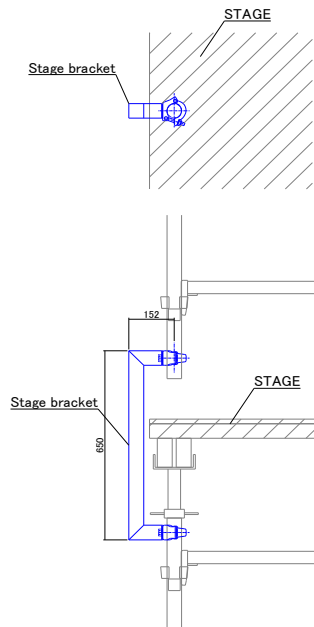

Stage bracket



Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998

CLAMP



Fix clamp

pipe 48.6/42.7



Swivel clamp

pipe 48.6/42.7



Beam clamp

Beam + pipe 48.6/42.7



Sheet clamp

pipe 48.6/42.7

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110

Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.



Rolling tower



Scaffolding for column

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502


Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.

order made

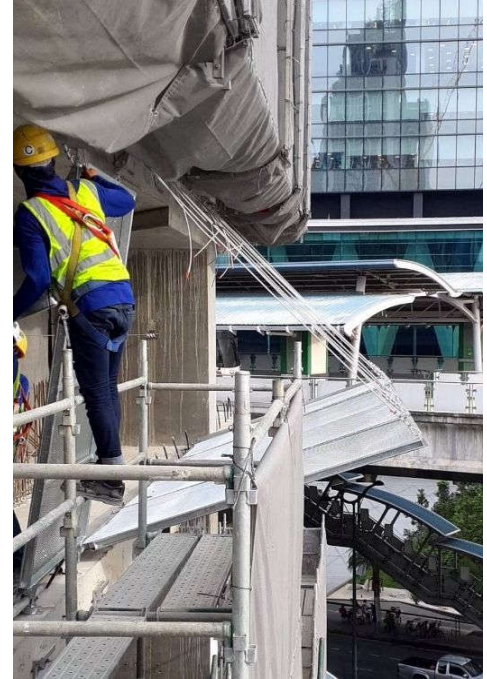

drop guard

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502




Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.

order made

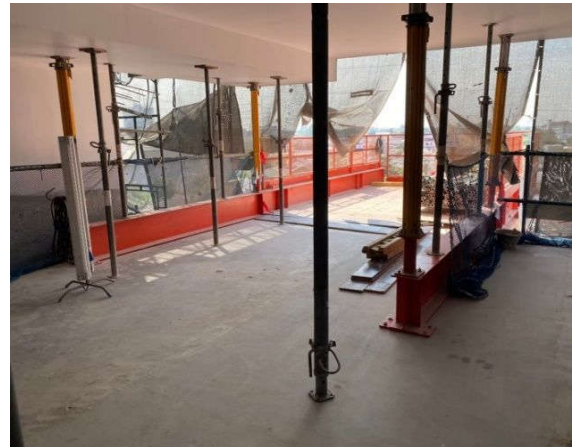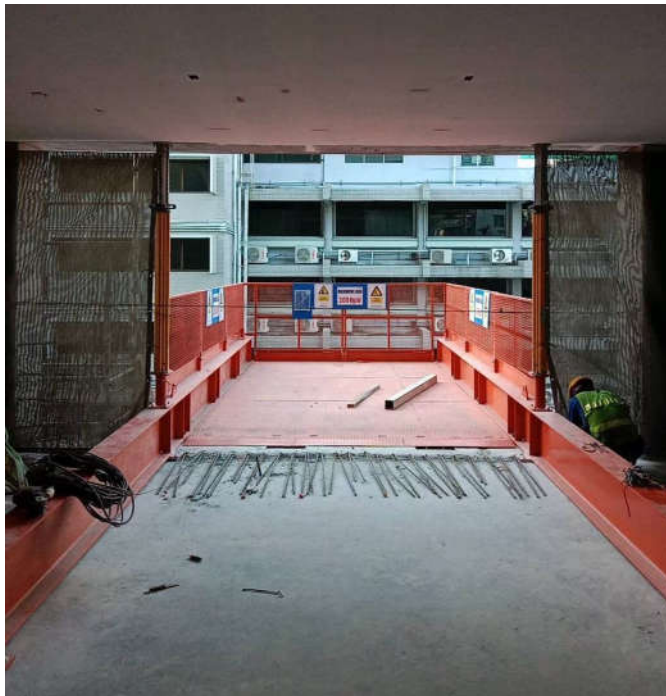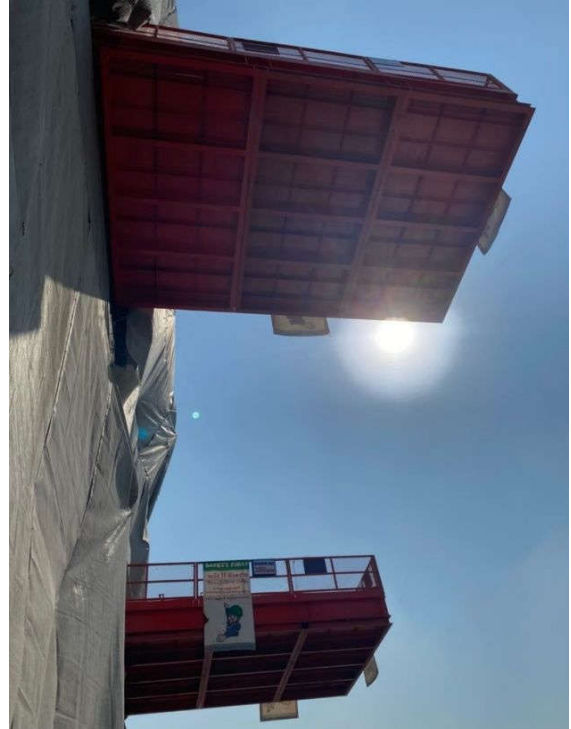

stage

Head office

SSP TOWER 555/31 14Floor,Soi Sukhumvit 63(Ekamai),Klongton Nue,Wattana,
Bangkok 10110

Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center




Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi

Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.

order made

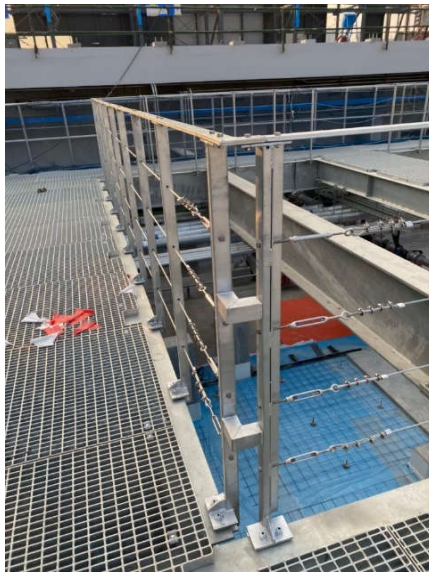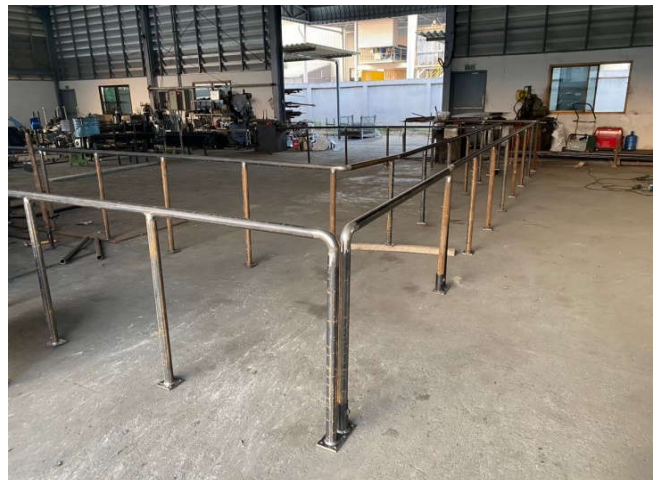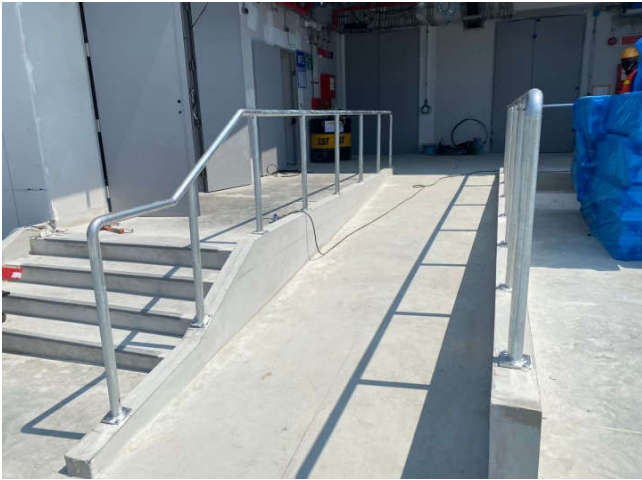

handrail

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502


Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.

order made

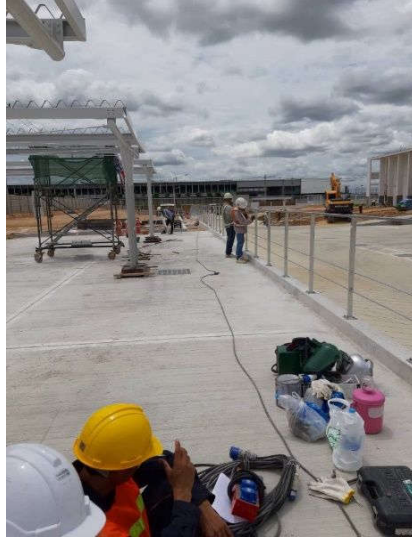

handrail

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110

Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi

Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.

order made



pit frame & cover

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110

Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi

Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO., LTD.

order made



gutter frame & cover

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110

Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center


Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi

Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.

order made

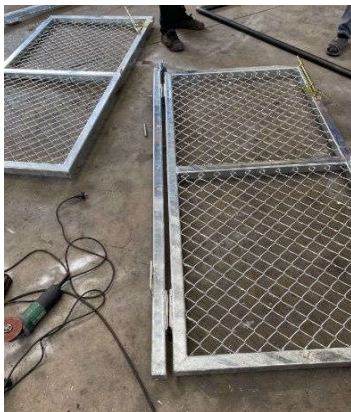

fence & gate

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110

Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi

Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.

order made



fence

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110

Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center



Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi

Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.

order made

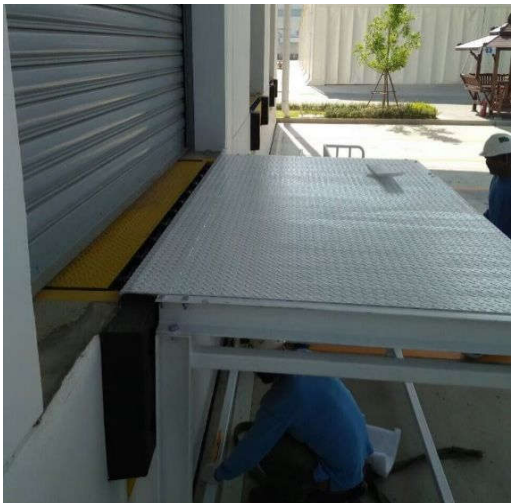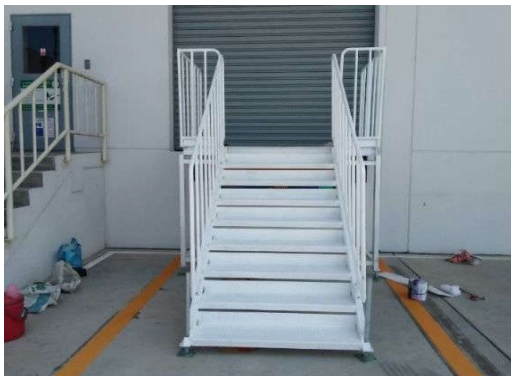

stairs

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110

Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi

Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.

order made



roof truss

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110

Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi

Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.

Self run type sliding self care unit



Head office



SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center


Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998

Feature


- Because it is a self-run-type sliding self-care unit, climbing is possible in a free timing.
- Because it is perpendicular climbing, include it in speedy - by security and change and can do it.
- We do not have to worry about the delay of the process by reducing the work load of the tower crane. (the climbing with the tower crane is possible, too.)
- It is easy and can assemble a unit in speedy.
- Carrying an opponent out of the ring peace, perpendicular net, electric chain block, shackle, the expansion and contraction, fixed dimensions, aluminum handrail

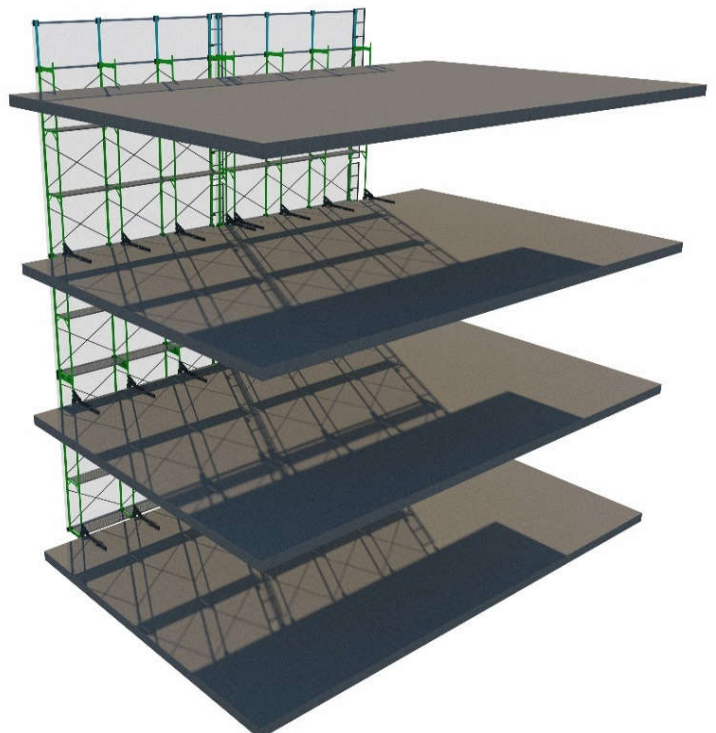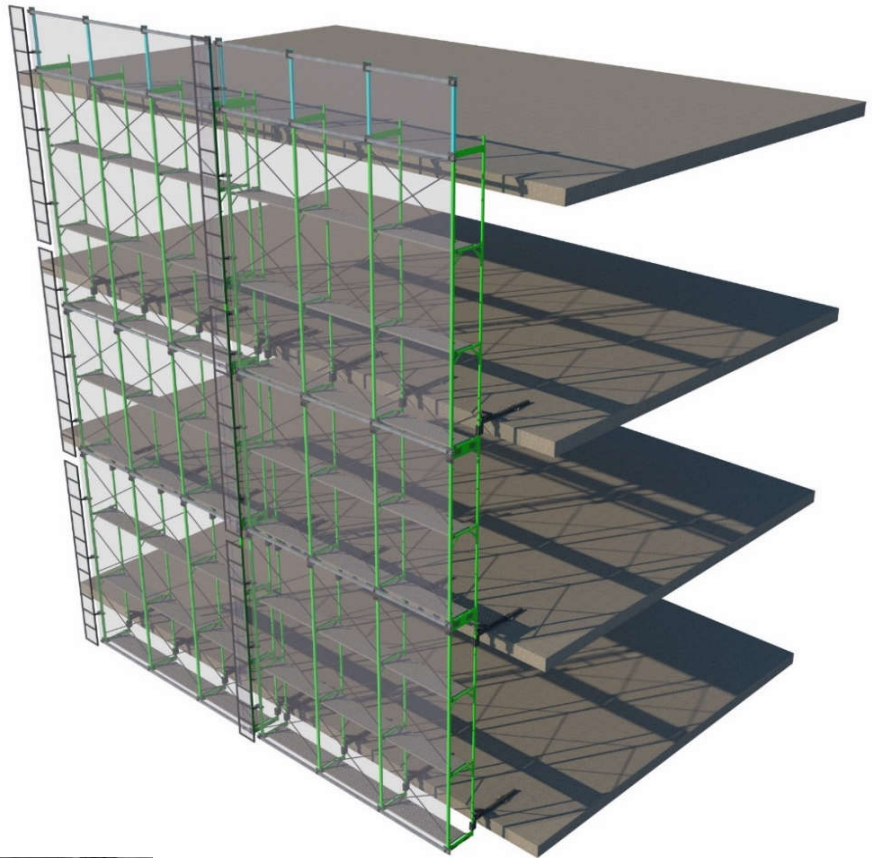



Climbing diagram




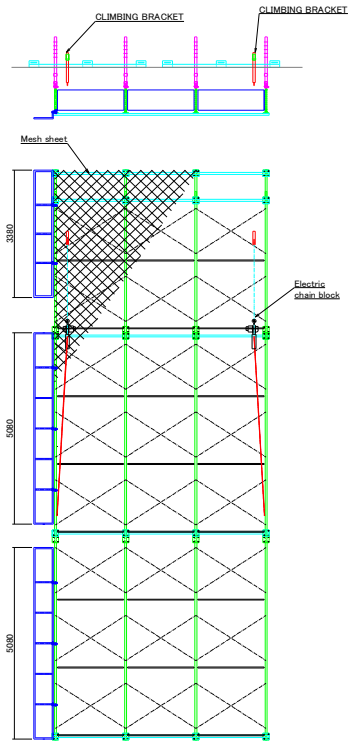


1500kg

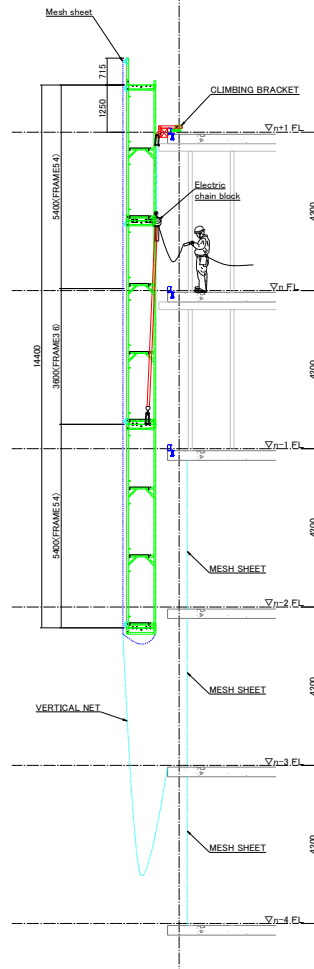

Climbing

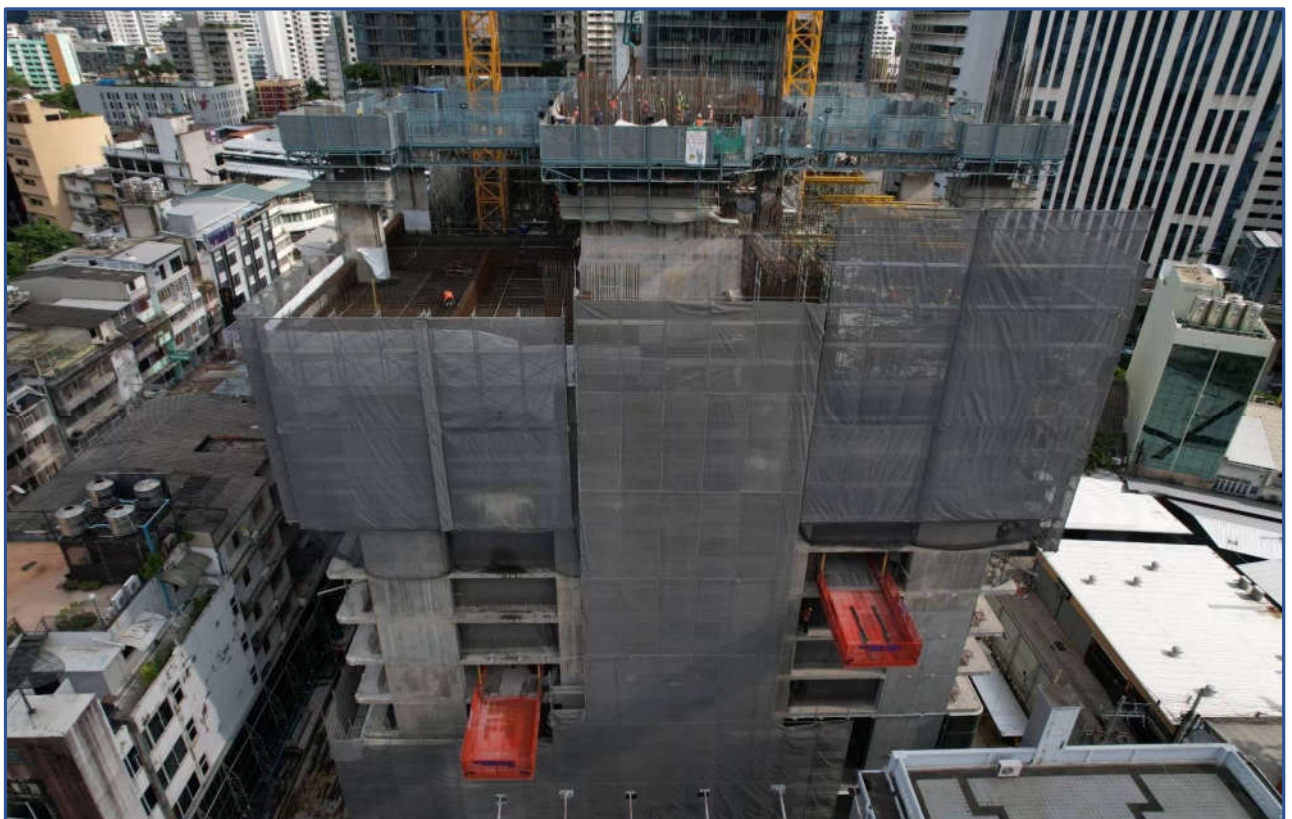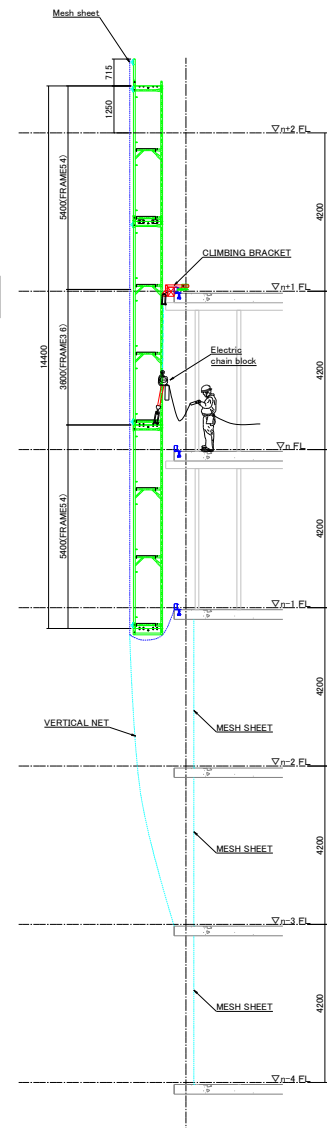

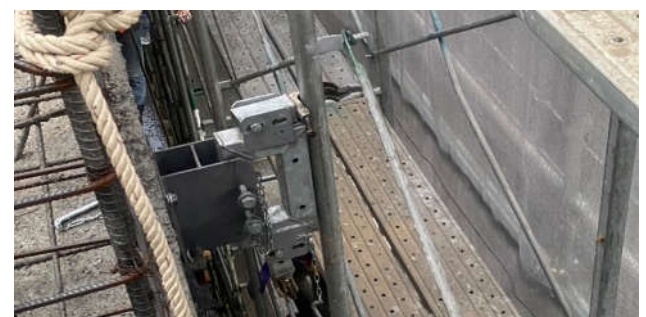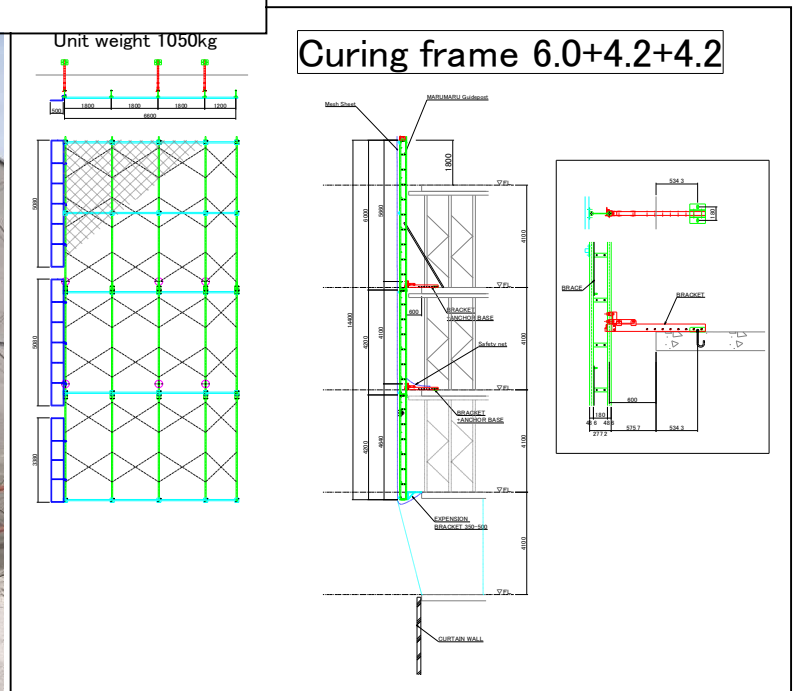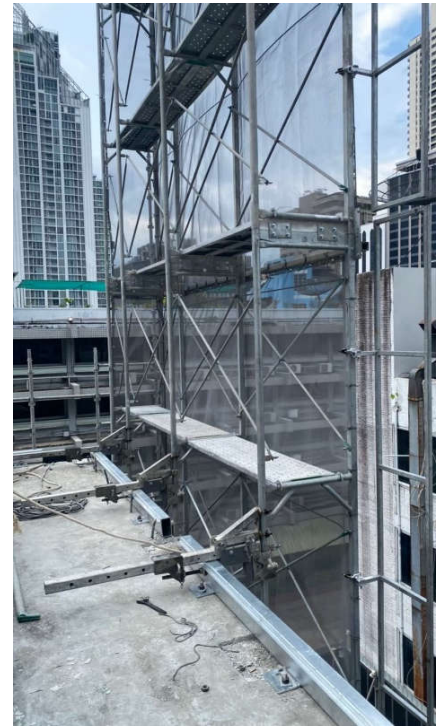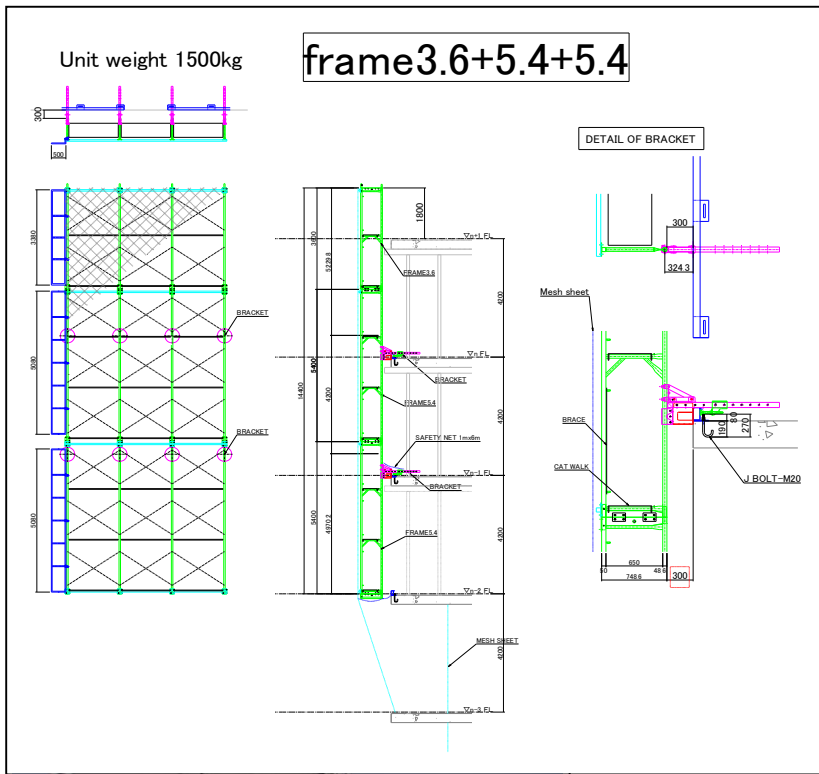



THAI SOKEN CO.,LTD.

**Head office**

SSP TOWER 555/31 14Floor,Soi Sukhumvit 63(Ekamai),Klongton Nue,Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998









THAI SOKEN CO.,LTD.

Tendai

Allowable load---100kg

※Handling of TENDAI

- 1.Please check usage.
- 2.Assembling and folding work should be done in pairs.
- 3.Do not use stepladders or ladders on the stand.
- 4.Do not move while carrying people!

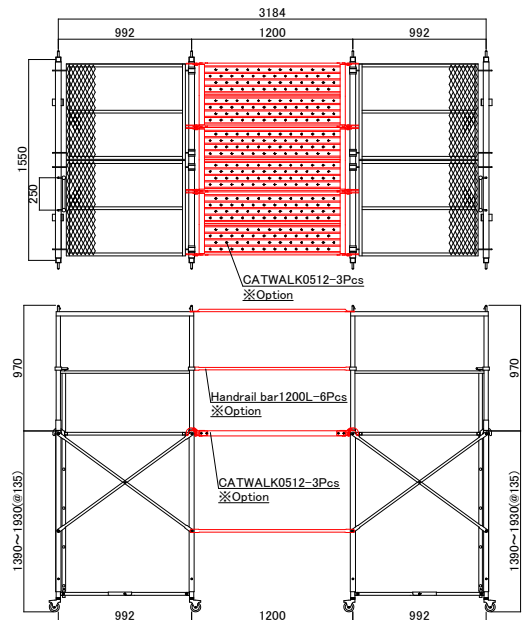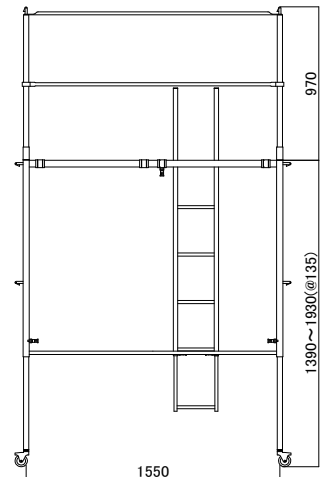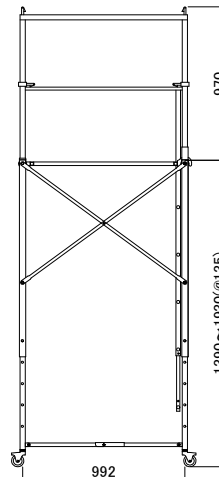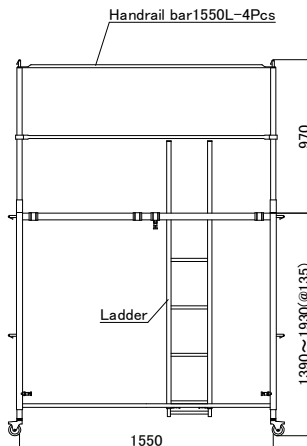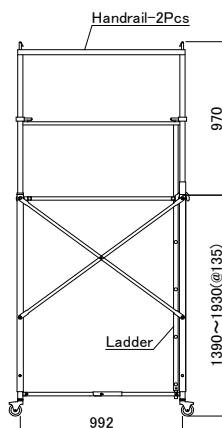

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.


Tendai

Assembly procedure




Step①

- Make sure that the casters are locked.
- Remove the lower fixing bracket and expand the lower part.

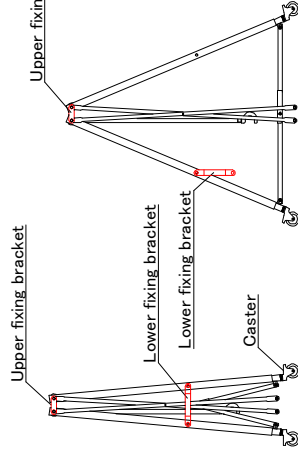


Step②

- Remove the upper fixing bracket, expand the upper part and attach the brace.

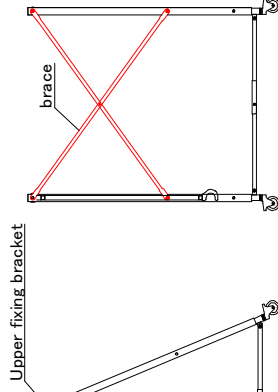


Step③

- On the side without the Catwalk, install ladder.

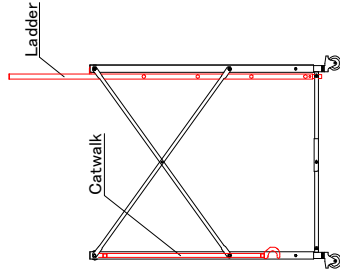


Step④

- Rotate the Catwalk outward and fix it.

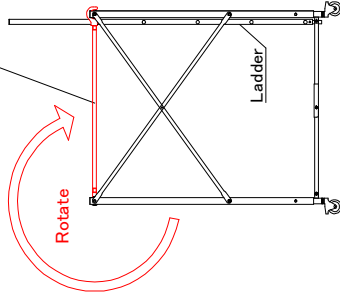





Step⑤

- adjust height

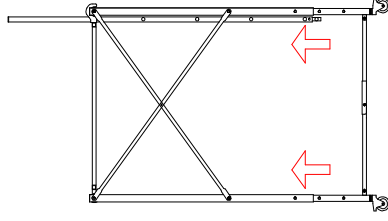

Step⑥

- Install handrails

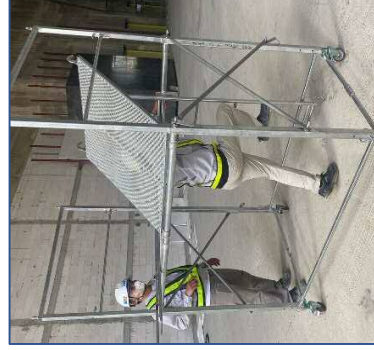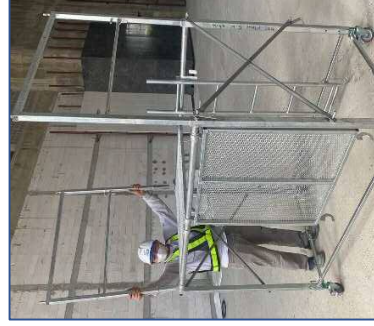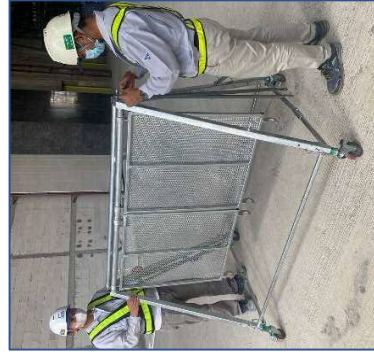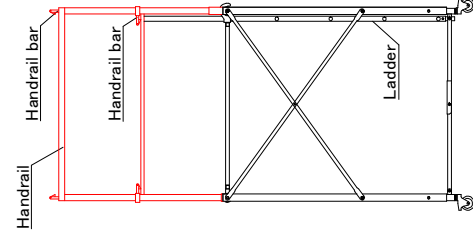





THAI SOKEN CO., LTD.


MINI Lift

❌ Please do not ride people

- Allowable load capacity...150kg
 - SHICHU3600...12.7kg × 11 = 139.7kg
 - TESURI1800...4.6kg × 30 = 138kg
 - TESURI900...2.4kg × 50 = 120kg
 - CATWALK0518...14.3kg × 10 = 143kg
 - CATWALK0218...7.4kg × 18 = 133.2kg
- Maximum use height 60m

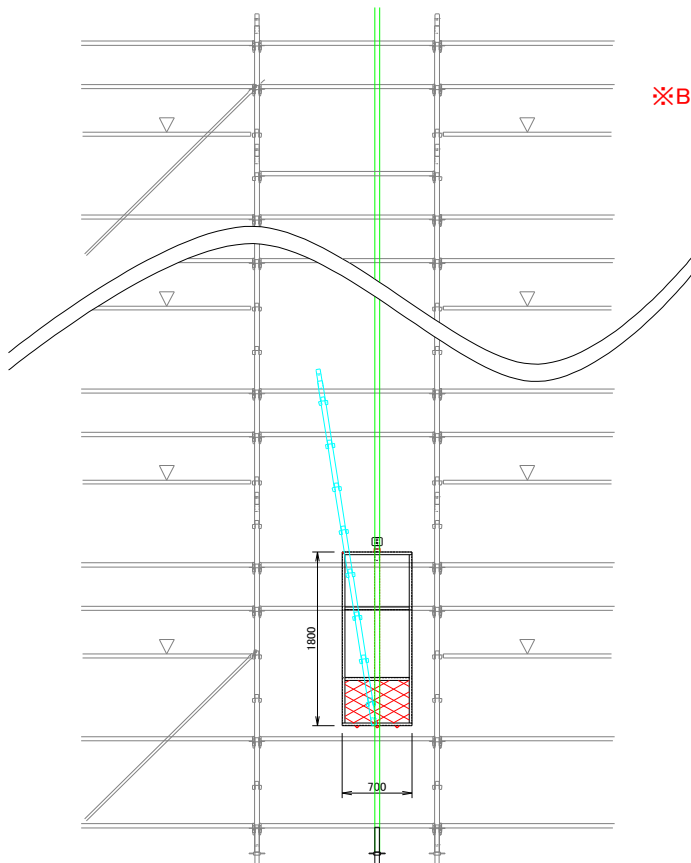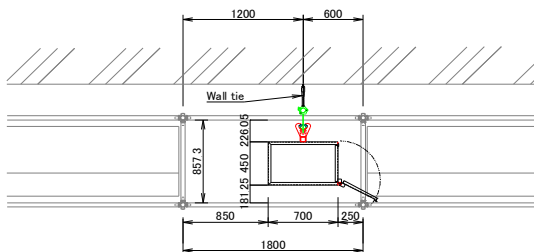

❌ Be sure to install a wall tie

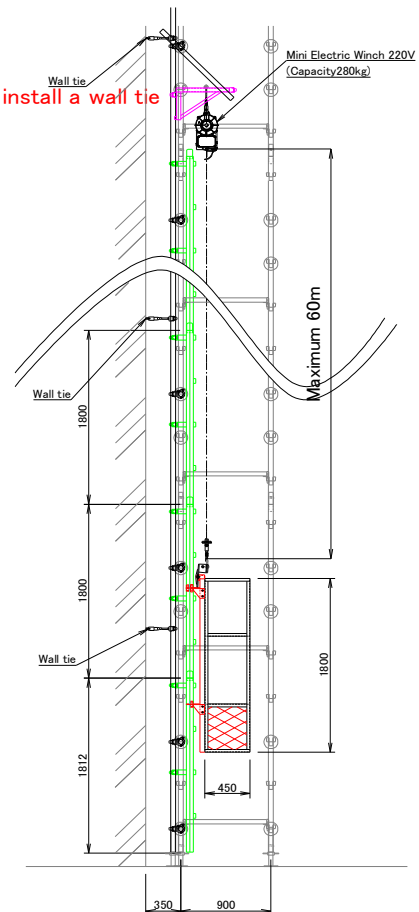

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502


Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998





THAI SOKEN CO.,LTD.

Opening Clinbring Staircase Unit

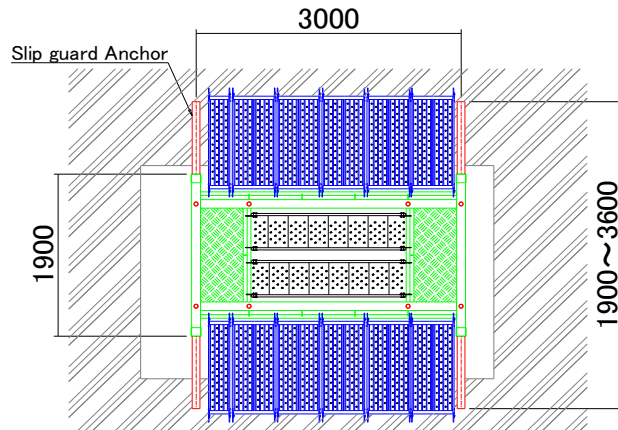

※Allowable load 400kg

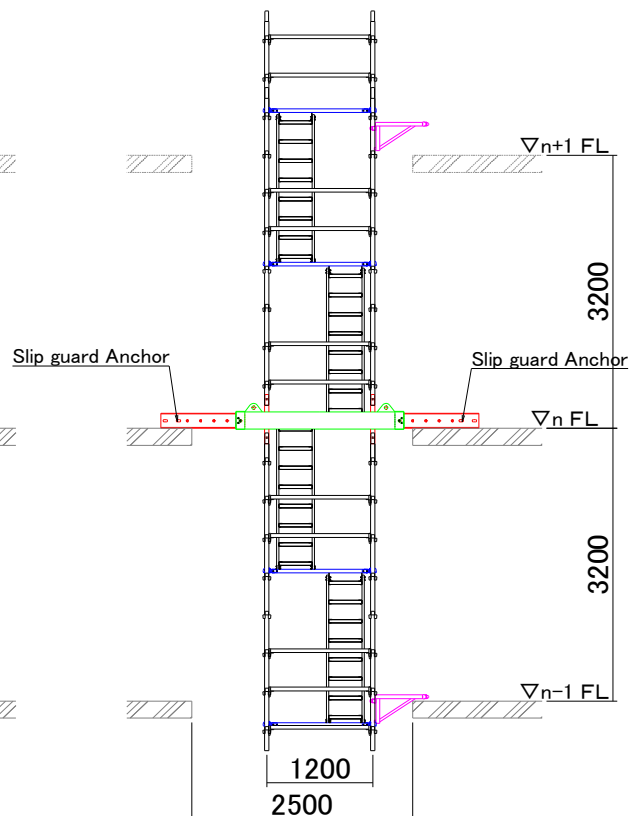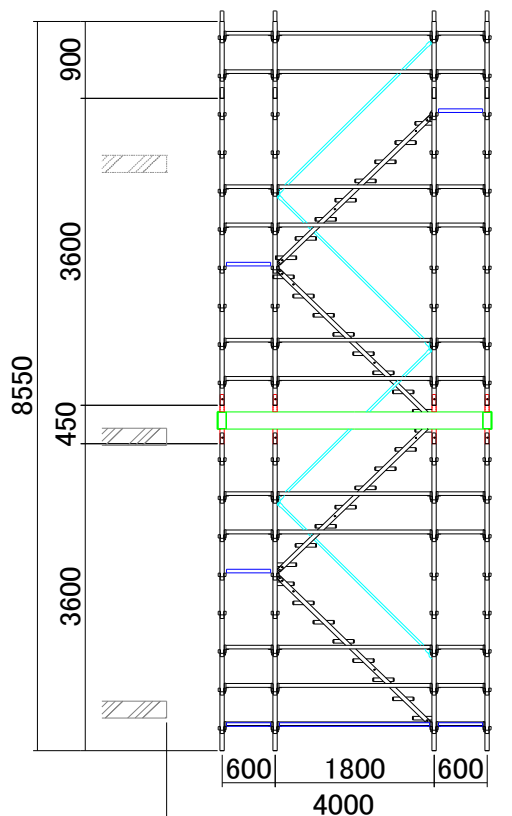

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110

Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi




Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.

Construction Fence B type barricade

Version	Construction fence		Outrigger	joint fittings	Weight
	normal	with door			
Size	1800x2017	1800x2017	1000x1200	30x86	100x100x400
Weight(kg)	17.20	25.70	2.80	0.20	10.30

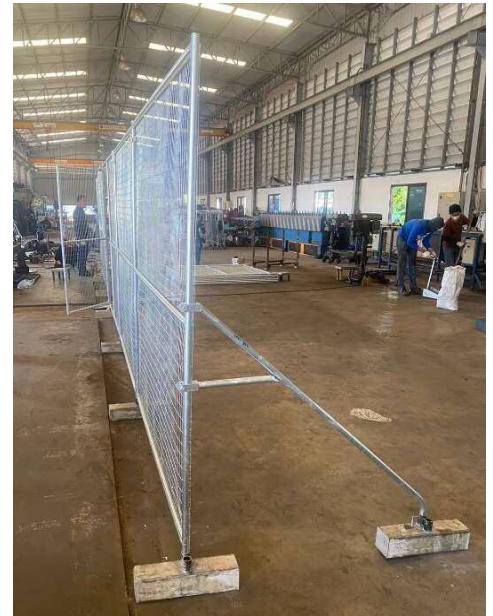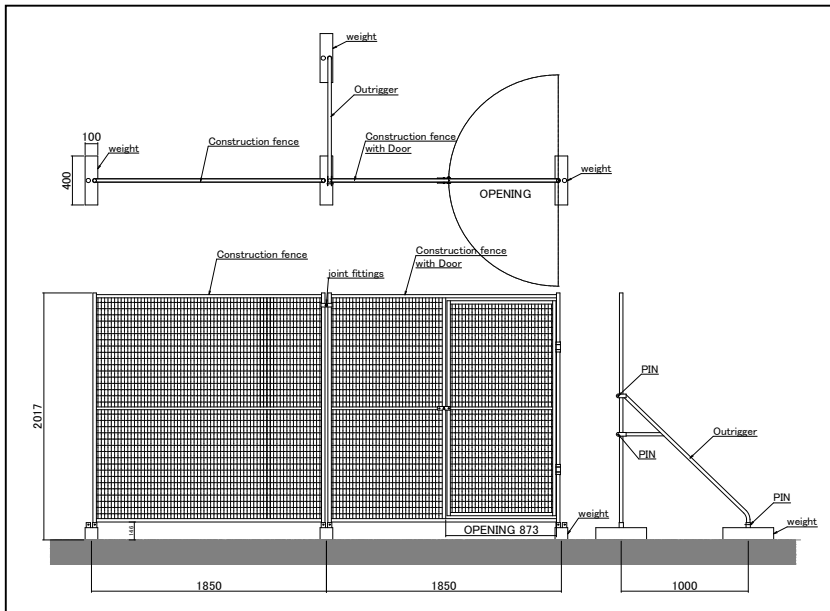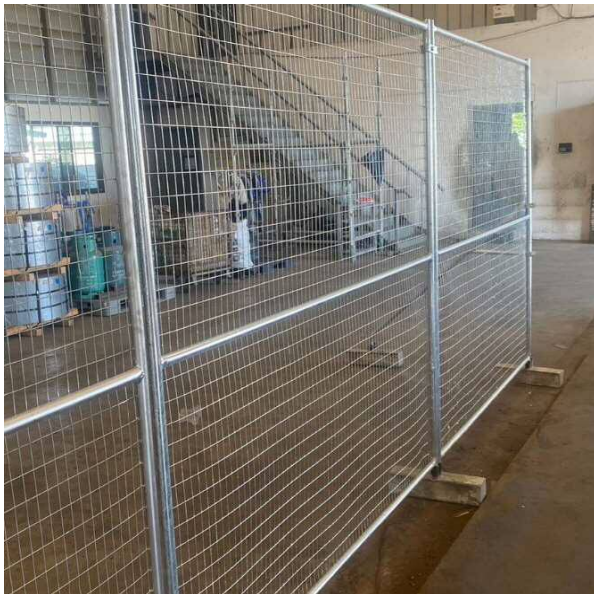

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998




THAI SOKEN CO.,LTD.

A type barricade



Unit weight 5kg

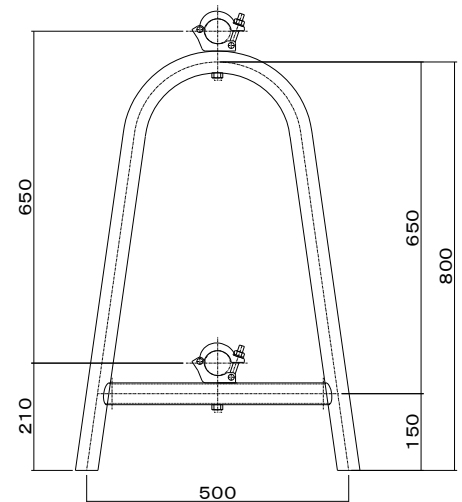

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110

Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center





Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi

Tel.03-690-9997 Fax.03-690-9998




THAI SOKEN CO.,LTD.

Slide handrail TESSLE

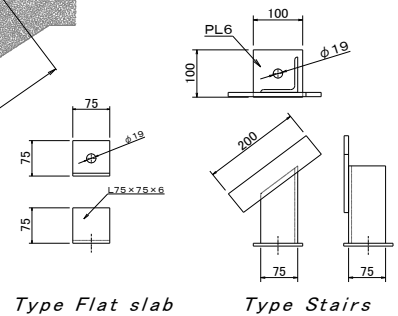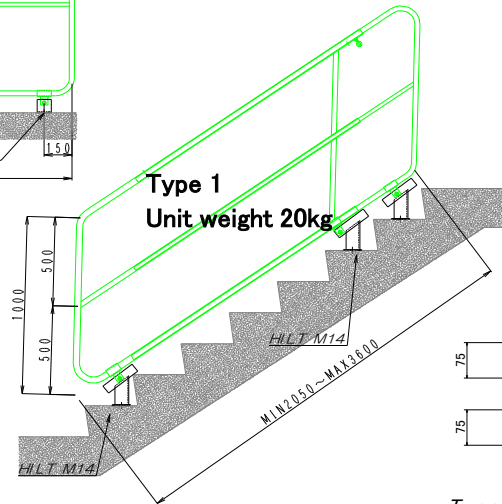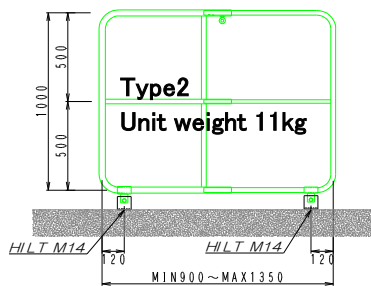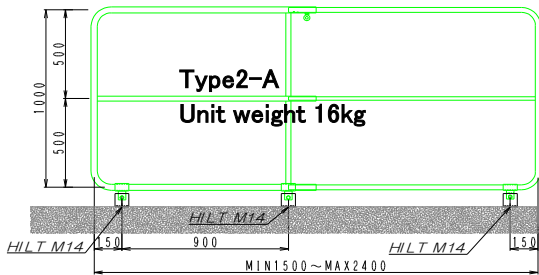

※Use anchors for fixation

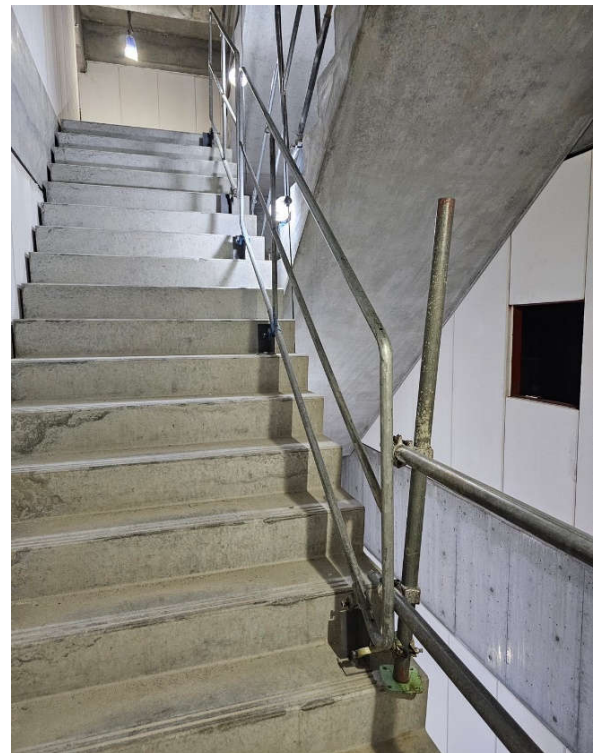

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.

Green road

- Perfect for ensuring safety
- Easy to assemble due to the frame and panel structure



⑤ Normal panel



③④ Roof



Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110


Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi


Tel.03-690-9997 Fax.03-690-9998

Assembly procedure

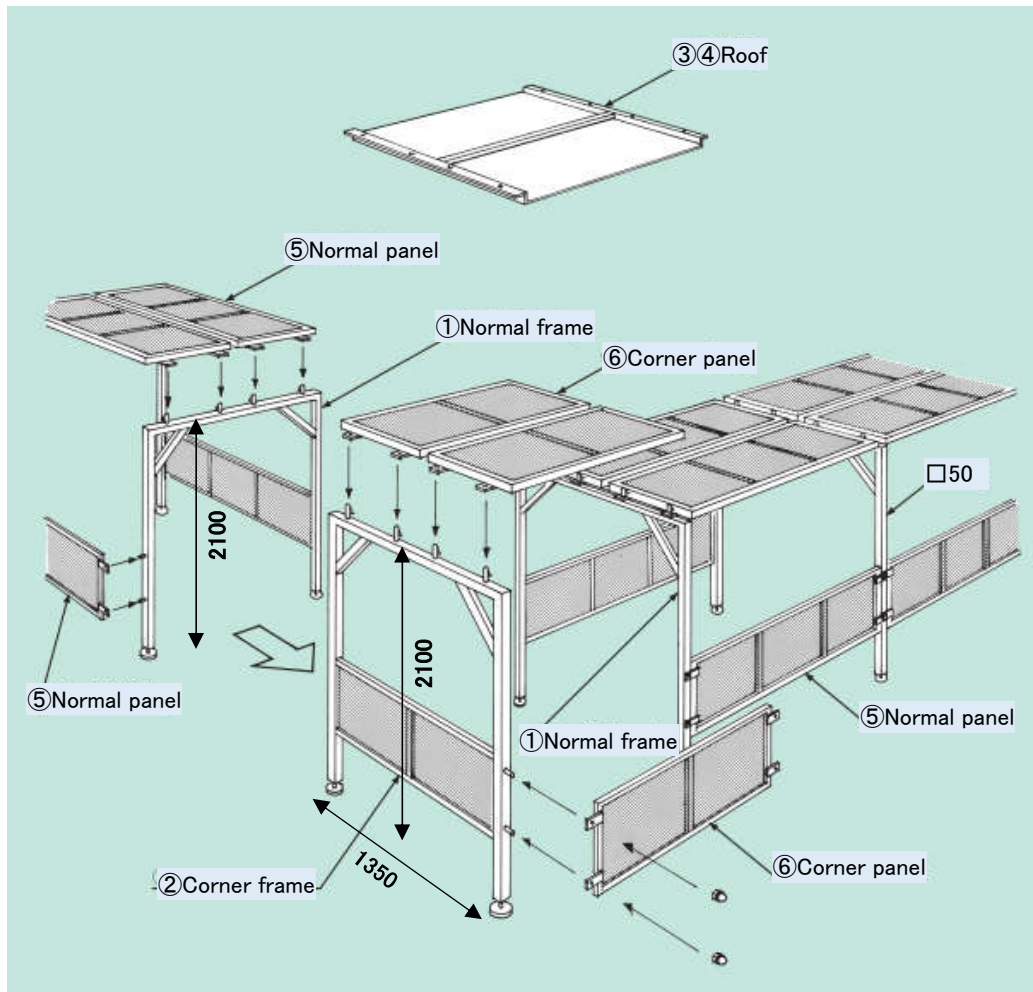


1. Stop a panel on the side of the normal frame
2. Leave a panel or a roof in the upper general frame
3. Fix a normal frame bent by metal fittings
4. The upper part turns off a lock for clamp
5. Fixation of the side panel is a nut

A punch panel part name

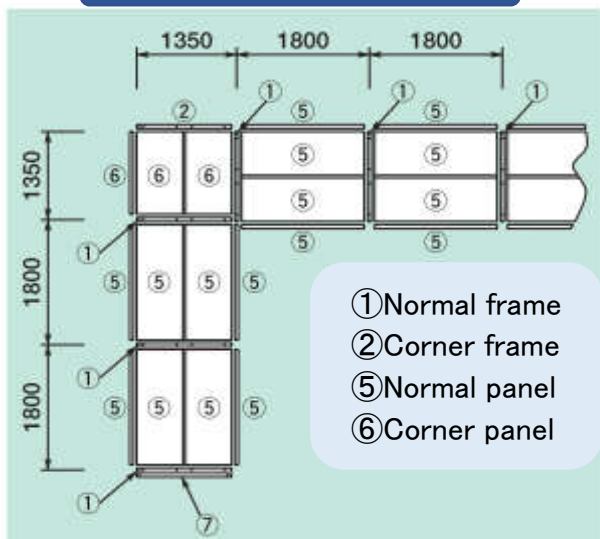

Prevention of rain roof part name

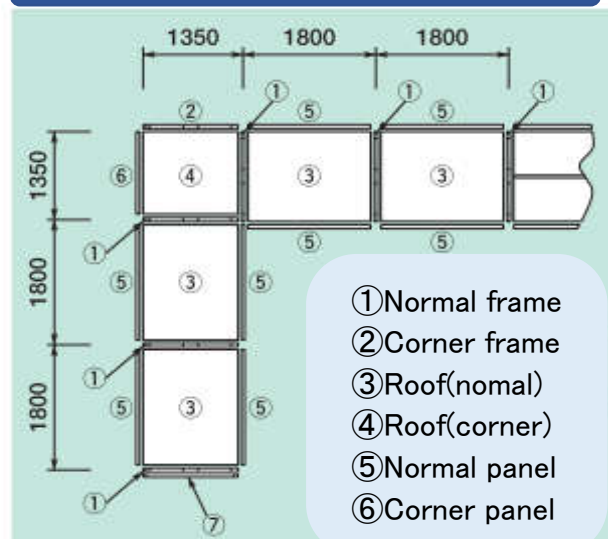





THAI SOKEN CO.,LTD.

OK mat

Reinforcing rod setting, simple scaffold of the concrete casting work

Feature

1. Can plan safe improvement
 - For crimp processing, do not slip
2. Prevent the disorder of the slavic reinforcing rod.
 - Prevent unity line cutting of the slavic reinforcing rod when I use OK mat.
3. Help cost reduction.
 - Because use light weight (one piece of 6kg) spring steel, there is not damage, consumption, and be cleared up, and it is possible for work such as movement, the safe keeping laying easily.

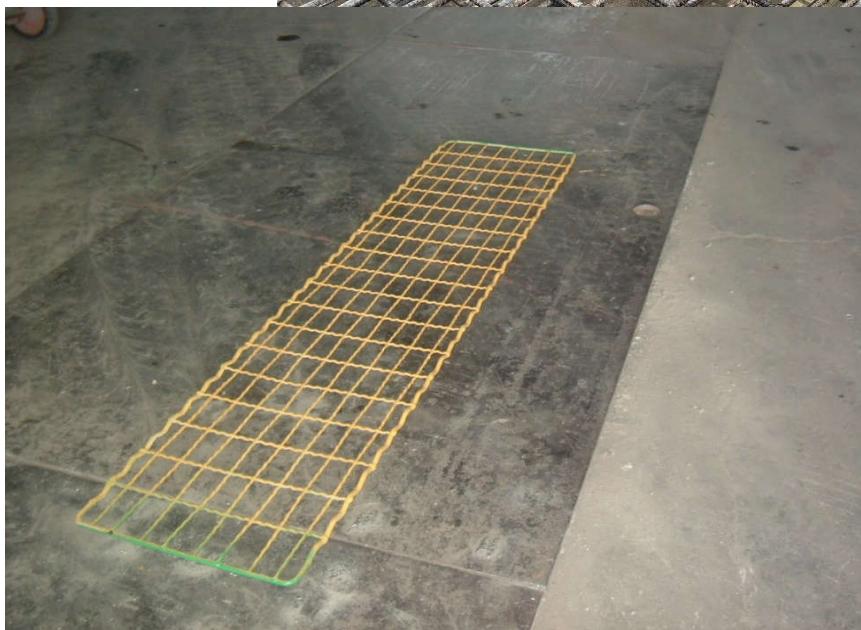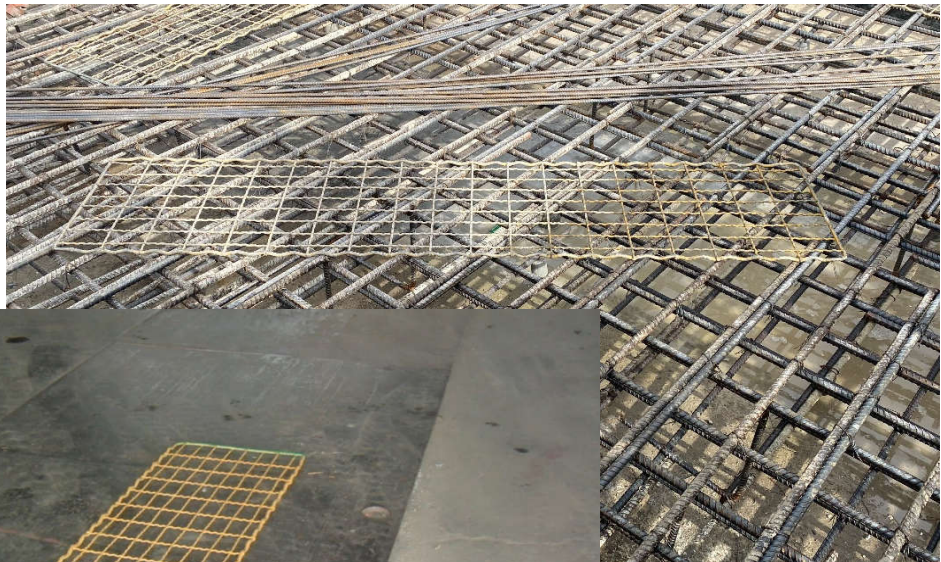

Size	Wire diameter	Plating finish	Unit weight
450x2000	$\phi 9, \phi 5$	350g/m ²	6kg

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63 (Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel. 02-711-6500 Fax. 02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel. 03-690-9997 Fax. 03-690-9998



THAI SOKEN CO.,LTD.

Uniteage



Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110


Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center


Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998

Assistant stage

Type-1

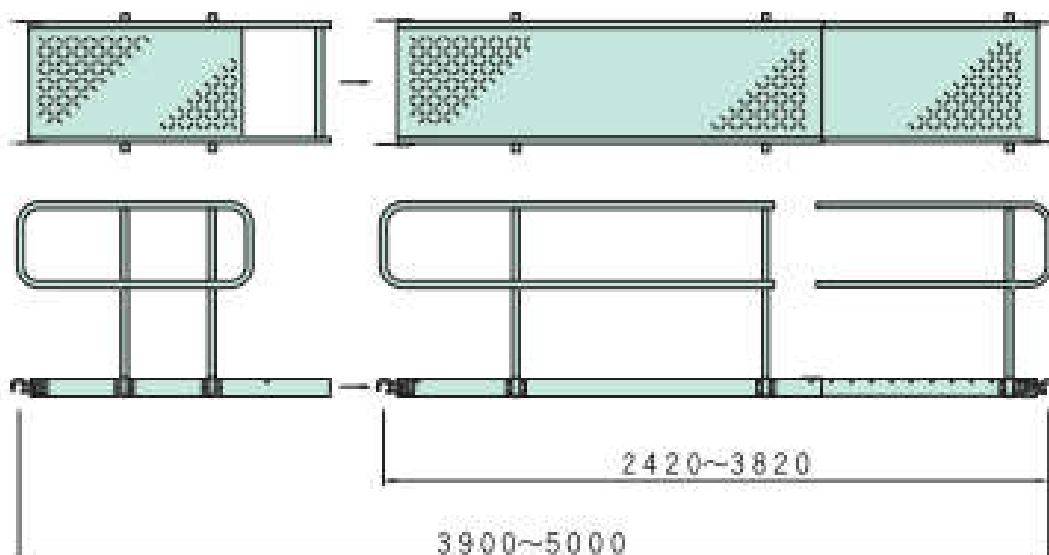

Type-2

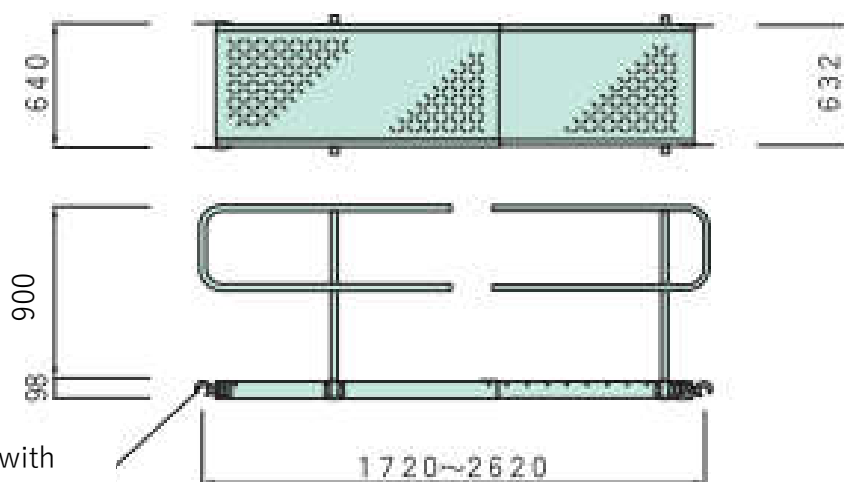

Compatible with
 $\phi 48.6$ and $\phi 42.7$


※Allowable load 250kg

Product name	Size	Weight(kg)
Main part type-1	MIN2420~MAX3820	34
Main part type-2	MIN1720~MAX2620	24
Assistant stage+type-1	MIN3900~MAX5000	11+34
Hand rail type-1	Type-1 only	15
Hand rail type-2	Type-2 only	11
Hand rail Assistant stage+type-1	Assistant stage+type-1 only	8+15



THAI SOKEN CO.,LTD.


Usage example (stairs)

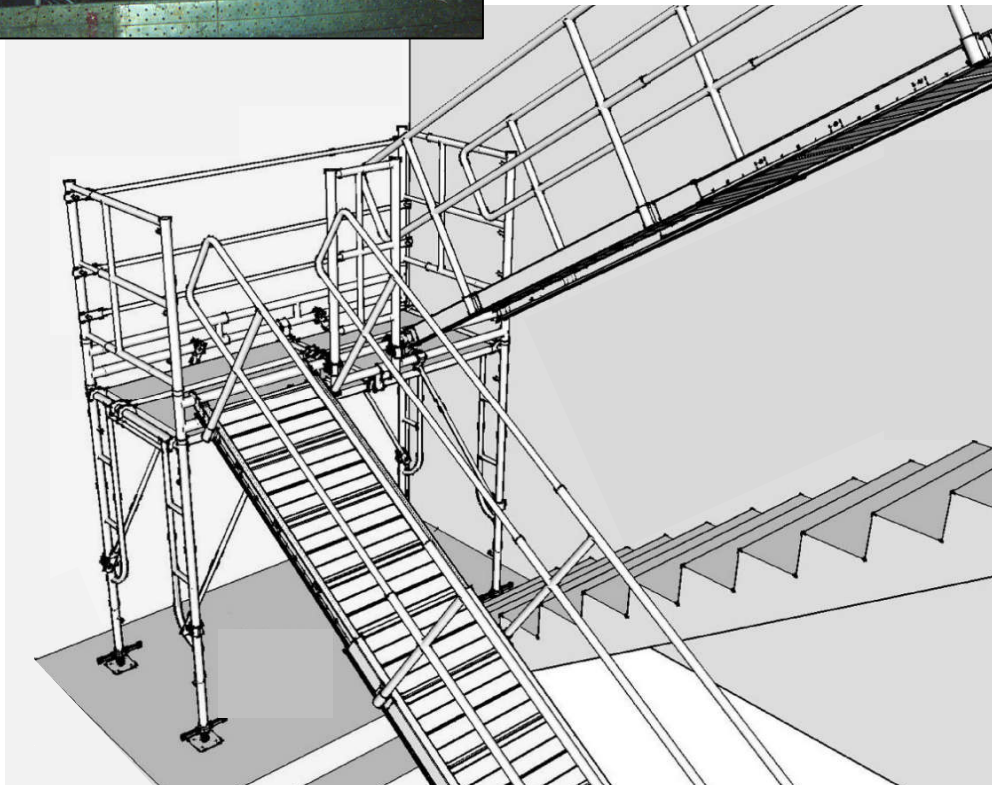



THAI SOKEN CO.,LTD.


Usage example (Underground bridge)

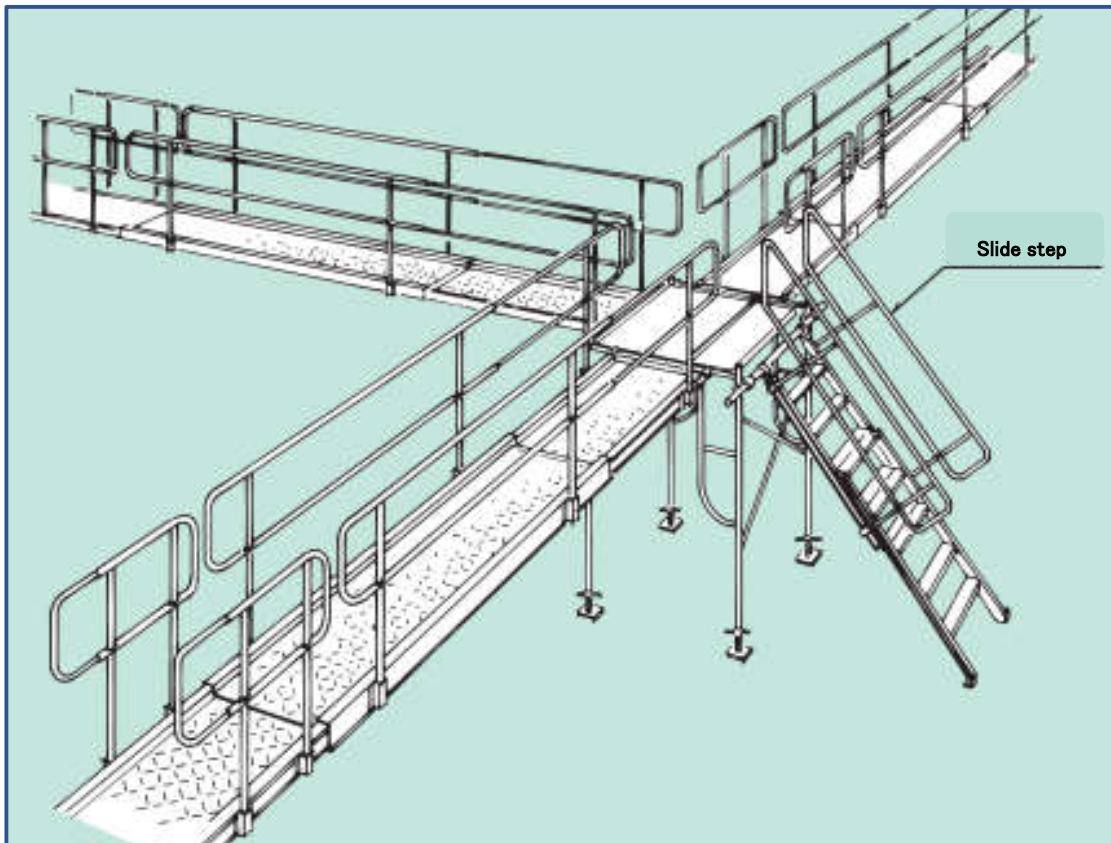



THAI SOKEN CO., LTD.

Easy Ladder

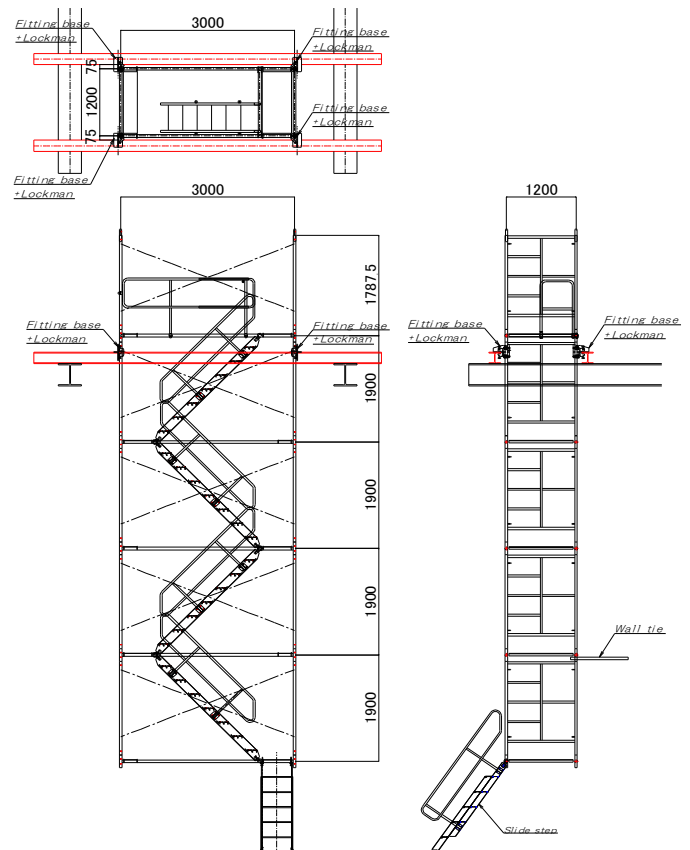

※Install a wall tie every 3 level

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110

Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.

Slide step








Slide step 2343

- Unit weight 30kg
- Hand rail weight 16.5kg x 2pcs
- Allowable load 150kg

Slide step 1725

- Unit weight 20kg
- Hand rail weight 15kg x 2pcs
- Allowable load 150kg

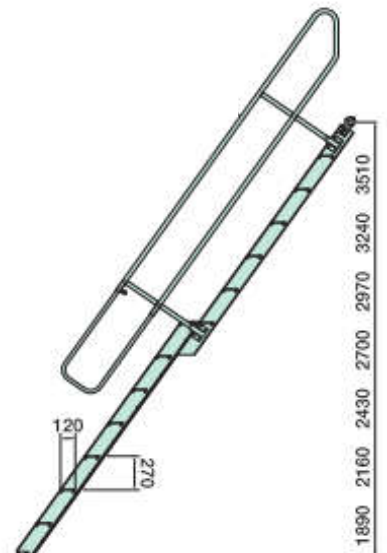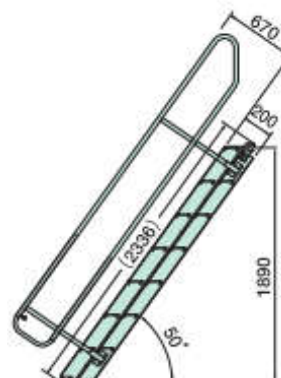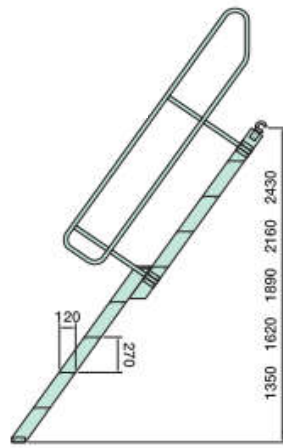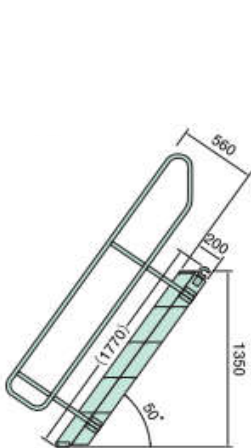

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana, Bangkok 10110

Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center


Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi

Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.

Column stage

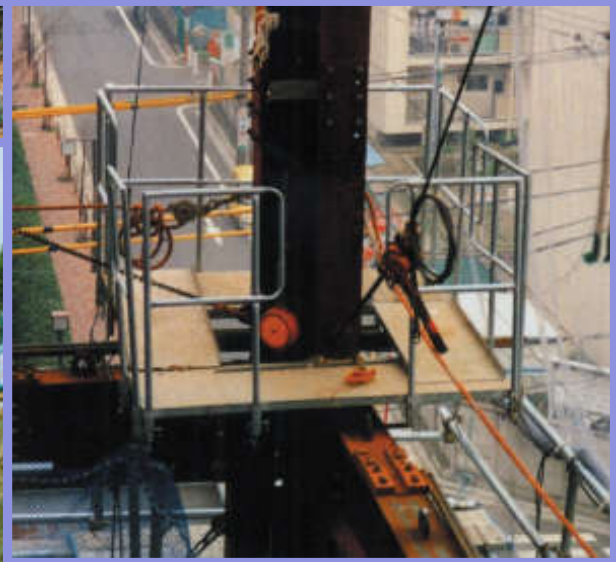

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110


Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center


Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi

Tel.03-690-9997 Fax.03-690-9998

Figure of H steel pillar flange chamfering charge account

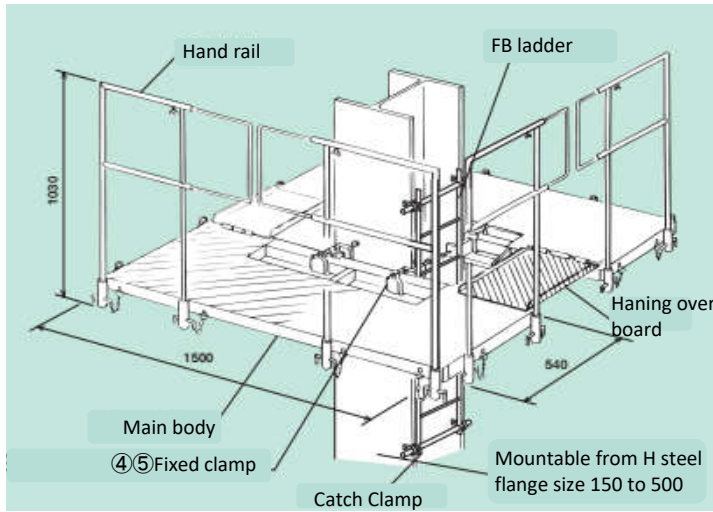

Dimensions

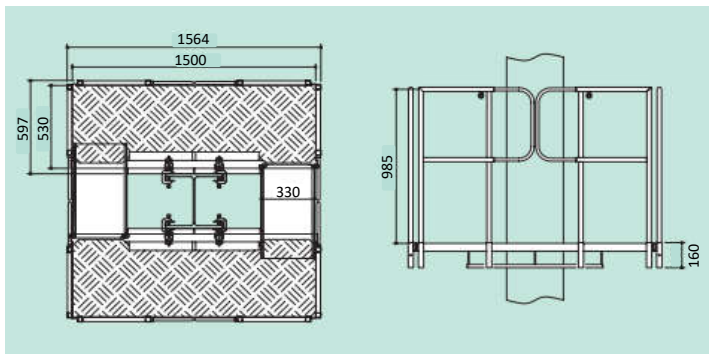


Attachment means

- 1.④ Attach a fixed clamp to a pillar.
- 2.① Attach the main body of stage to ④ fixed clamp.
- 3.② Attach a handrail to the main body.
- 4.③ Fix a hanging over board with an attached pin.

The stake place please reverse one or two turns for installation.

FB ladder

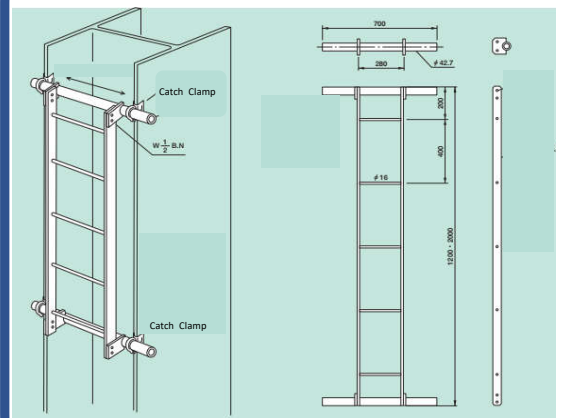

FB ladder 2m Self weight 17kg
FB ladder 1.2m Self weight 16kg

1set(per none of the main bodies)of amount

Item name	Par Pillar	Volume	Self weight
①Work top for pillar 1500L	2 pcs.	1 pcs.	18kg
②Handrail	8 pcs.	4 pcs.	4kg
③Hanging over board 600・700・1000	2 pcs.	1 pcs.	(4kg)
④Fixed clamp right	2 pcs.	1 pcs.	1.5kg
⑤Fixed clamp left	2 pcs.	1 pcs.	1.5kg

Hanging over board 600L supports to Hsteel size 500mm .the further H steel please use 700L,1000L.

✂ Allowable load 200kg,Mountable from H steel flange size 150 to 500

Attention in the use

- This follow live load,installation H steel flange width,and each bolt or pin tightens it surely,and please use it.
- This get on a handrail,and please do not jump onto the stage.
- Please do not use the handrail for the carrying an opponent out of the ring cause of the rope of the security rope,a pro-rope,support,a wall filler,the support points such as footing boards or the material boots.



THAI SOKEN CO.,LTD.

KIRIBARI Bracket

specifications

- H steel adaptation size 250, 300, 350, 400 mm
- Unit weight 5 kg
- Allowable load 200 kg
- Up to 24 mm thickness

Assembly procedure


The setting span length of each bracket assumes it less than 2 meters.
Take handrail height enough and please ensure the security.




Toe board clamp




Step1

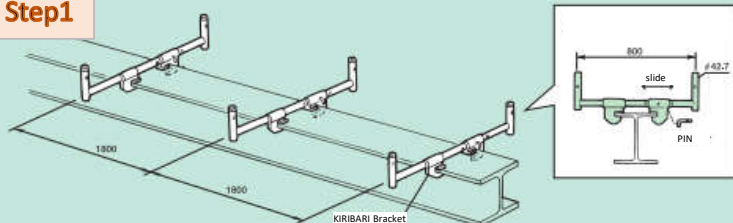

Step2

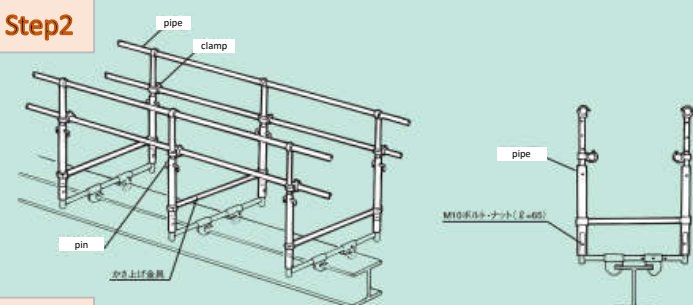





Step3

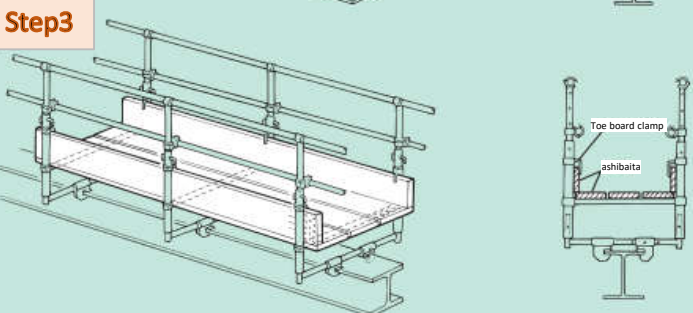

Catch tube

specifications

- Unit weight 2.8 kg
- Up to 24 mm thickness

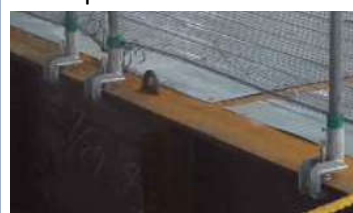



THAI SOKEN CO.,LTD.

Aluminum Ladder


1ALF

MAX
150kg



2ALF

MAX
120kg



specifications

※In use, it is approximately 75 degrees



1ALF

Version	length(m)	Weight(kg)
1ALF-21	2.07	5.0
1ALF-31	3.10	6.5
1ALF-41	4.12	8.4
1ALF-51	5.14	10.3
1ALF-61	6.16	12.2

Ladder Holder type-Square




specifications

correspondence pillar dimensions

□ 300~600mm

Ladder Holder type-H beam

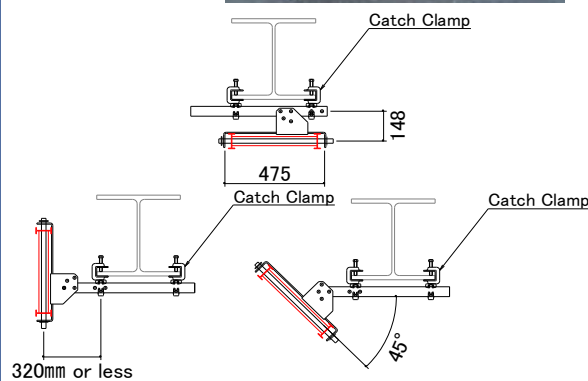

specifications

correspondence pillar dimensions

H150~500mm


2ALF

Version	length(m)	Length Contraction	Weight(kg)
2ALF-80	7.96	4.56	21.6
2ALF-107	10.68	5.92	29.5



THAI SOKEN CO.,LTD.

Column Lock & Chain equalizer

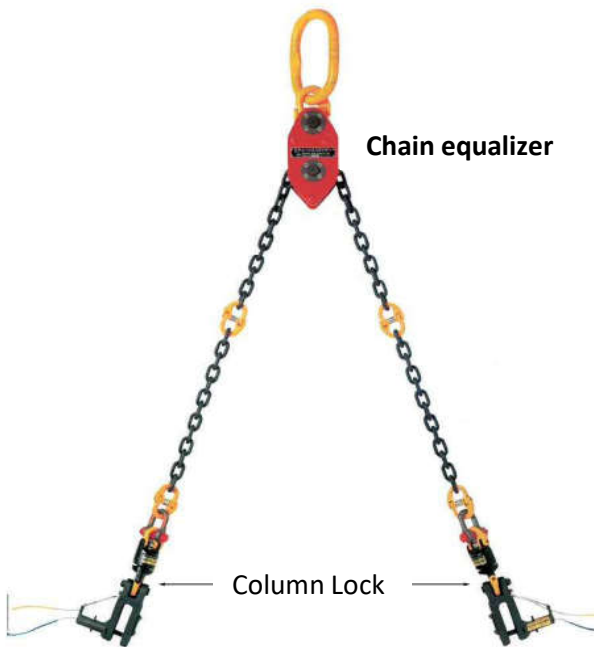

Chain equalizer

Column Lock


Chain equalizer & Column Lock

※Allowable load 10t
(ColumnLock 5tx2)



Chain equalizer


ColumnLock

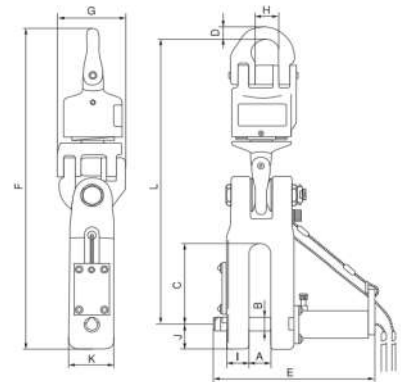


A-26mm, B-18mm, C-103mm

Column Lock



※Allowable load 5t



The working load changes depending on the dimension of H

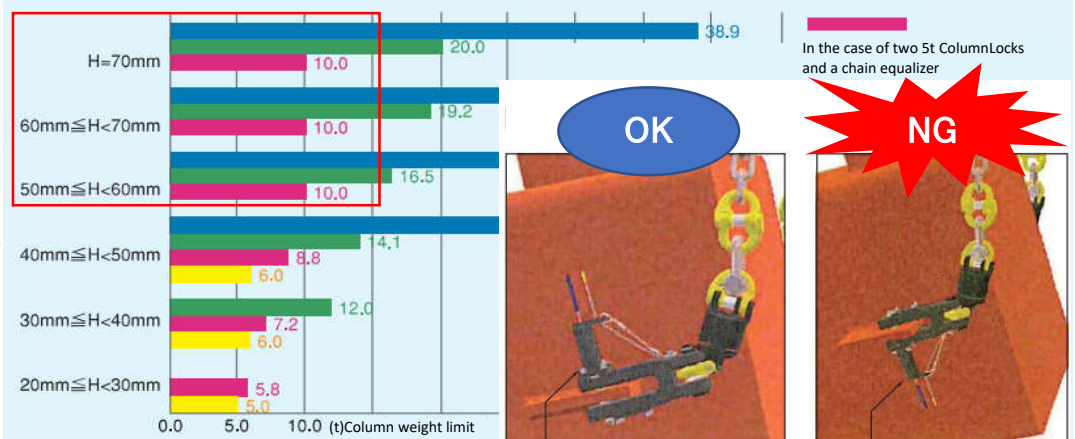

The thickness of the hanging piece is 22 mm

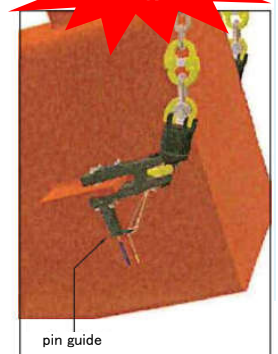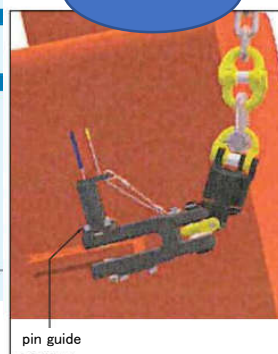

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998




THAI SOKEN CO.,LTD.

TOBIC





specifications

Model	B x W x H(mm)	Weight
TOBIC 1	617 x 763 x 1260	13kg
TOBIC 2	617 x 1063 x 1260	15kg

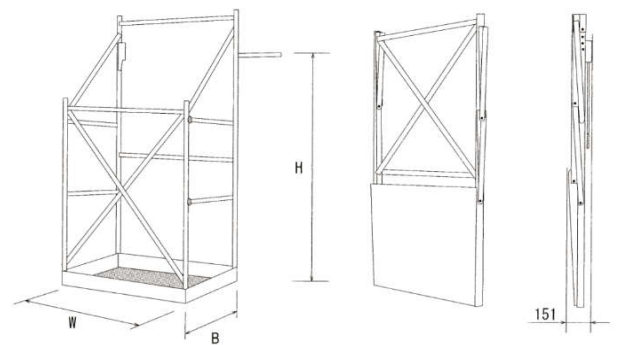

✳️ **Allowable load 200kg**

Model	Last clampings height of the beam	Splice plate or deck tray plate	
		Use only ONE	TWO meeting use
TOBIC 1	250~760mm	650mm or less	600mm or less
TOBIC 2	250~760mm	950mm or less	900mm or less

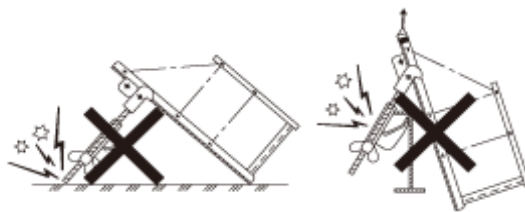

- You must main pillar① and safety lock② hit the top and bottom flange by all means.
- You must hook③ catch the upper flange by all means.
- Thorw on a hook and must not hit it.

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502


Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998



THAI SOKEN CO.,LTD.


Rushing belt

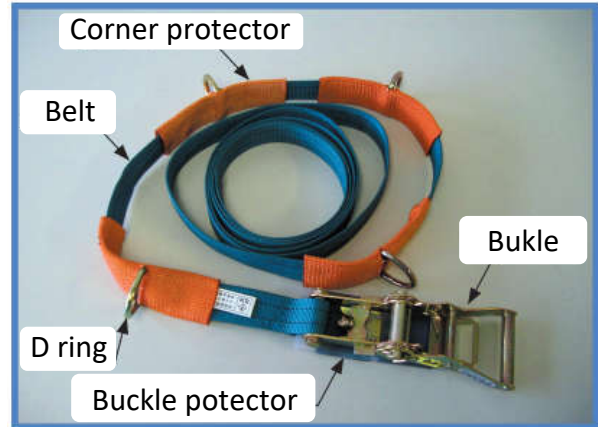

Specifications

- Belt part : 3.5m×35mm Breaking load 2000kg
- Breaking load of D RING 2300kg
- User's weight 85kg

Rushing belt part name

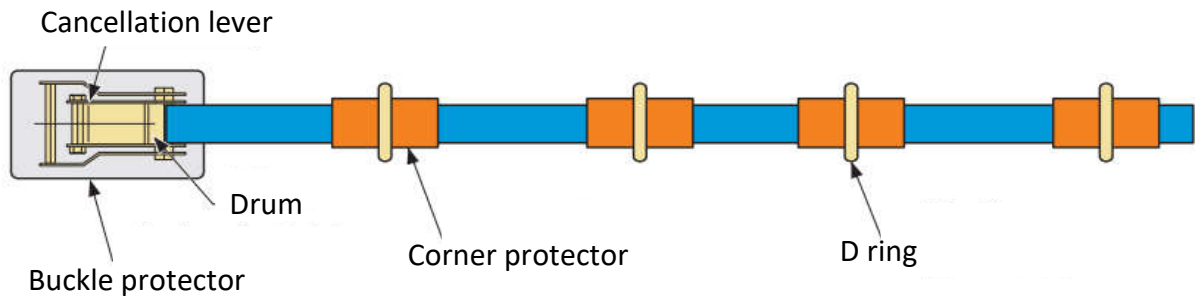

Installation



1.Put a belt through the buckle protector

2.Put a belt through the drum


3.Operate a buckle and tighten it

4.Completion

5.Pull a cancellation lever

6.Pull a belt

Adaptation pillar size

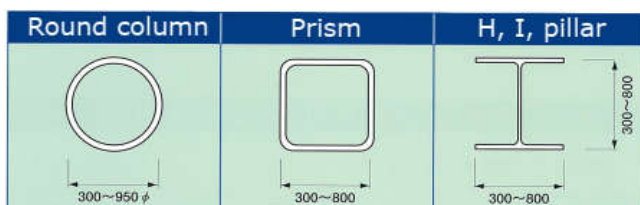

Attention in the use

In the case of welding,the blowout,fire please do not be successful.
In addition,please use it on conditions less than 100 degree es.



THAI SOKEN CO.,LTD.

Life line



Life line
7m,10m,15m,20m

HARIPPU




Safety Block



Safety Block
10m,12m,15m,20m

Case of work with a span of 10m

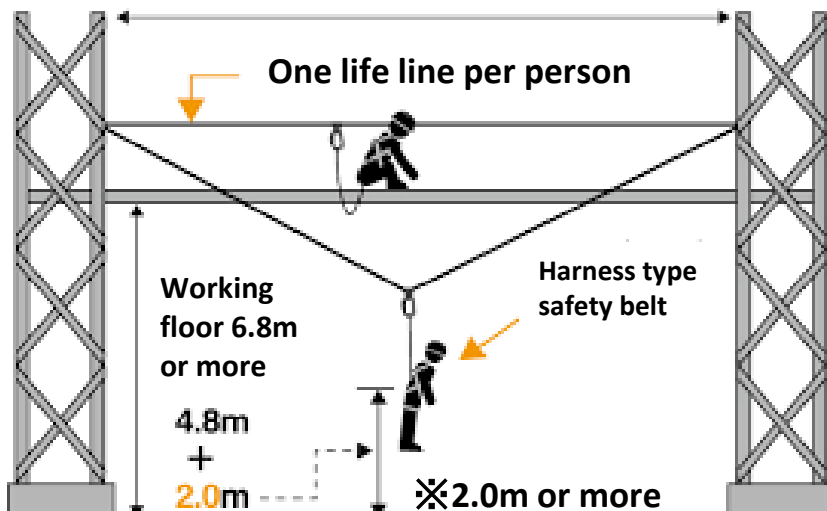

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998




THAI SOKEN CO.,LTD.



RENFROE Clamp



Renfroe clamp
1T,2T

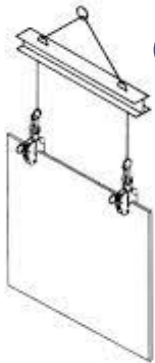

OK

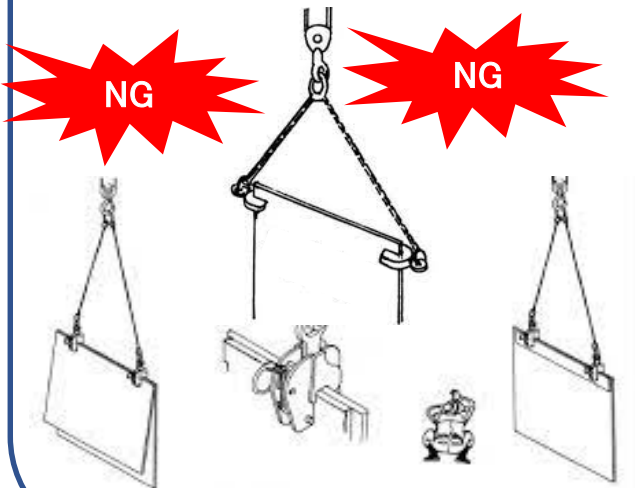


EAGLE Clamp



Eagle clamp
SB1T,SB2T



tightening line
(If it disappears,
tightening is completed.)

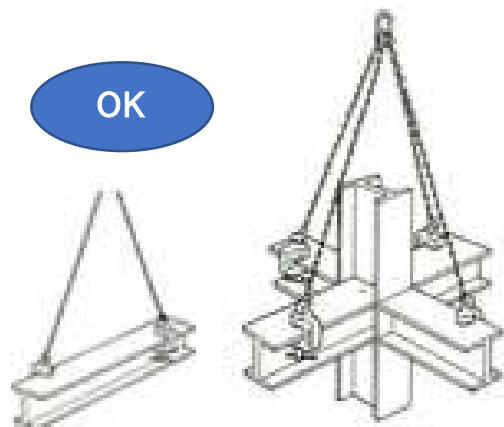

Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana,
Bangkok 10110
Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi
Tel.03-690-9997 Fax.03-690-9998




THAI SOKEN CO.,LTD.

KITO CLIP



Commodity(t)	Model	Diameter Wire(mm)	Weight (kg)	Dimensions(mm)		
				a	b	c
1.5	KC140	12~14	2.0	42	19	15.5



Lever Block



**Lever Block
1.5t**

HT LONG SHACKLE



Head office

SSP TOWER 555/31 14Floor, Soi Sukhumvit 63(Ekamai), Klongton Nue, Wattana, Bangkok 10110

Tel.02-711-6500 Fax.02-711-6502

Saraburi stock center

Nongkae Industrial Estate 47/5 Moo 14 Tambon Kokyae Amphur Nongkae Saraburi

Tel.03-690-9997 Fax.03-690-9998

Mesh pallet

Feature

- Assembling and the folding are simple
- The anteroposterior door is opened fully to the bottom
- The use is activity in every carrying eternity
- Combined use four steps of accumulation possibility on a shelf
- Fork work is easy



Size Model	Capacity (Kg.)	External form dimensions			Heigh (mm.)	Diameter (mm.)	Wire netting pace (mm)	Capacity (m³)	Fork clearance (mm)		Self weight (Kg)	The stop product
		L	W	H								
SM-3	1500	800	1000	850	100	6.4	50×50	0.54	566	890	57	4
SML-4	1250	1000	1200	910	100	6.4	50×50	0.88	666	1090	87	4
SW-3	1500	800	1000	850	100		50×50	0.54			57	
SW-4	2000	1000	12000	910	100		50×50	0.88			87	

Attention

- In the step product, please do not open up the door of the downward palette all the way.
- Hang it, and please do not use the deep frying.





SOKEN SANGYO

Iron footstool (with a wheel)

7 TON用



Self weight 50kg.

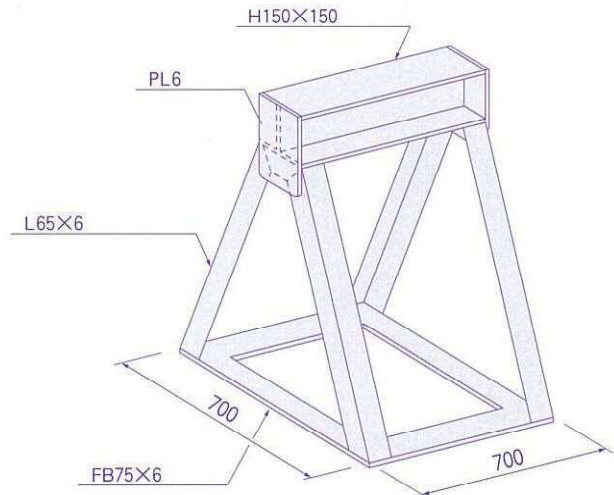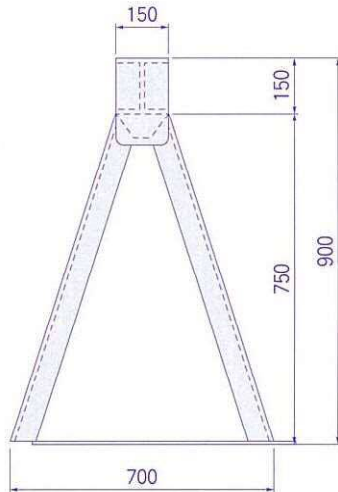

13 TON用

Self weight 77kg.

ラクラク移動、車輪付 (PAT.P)

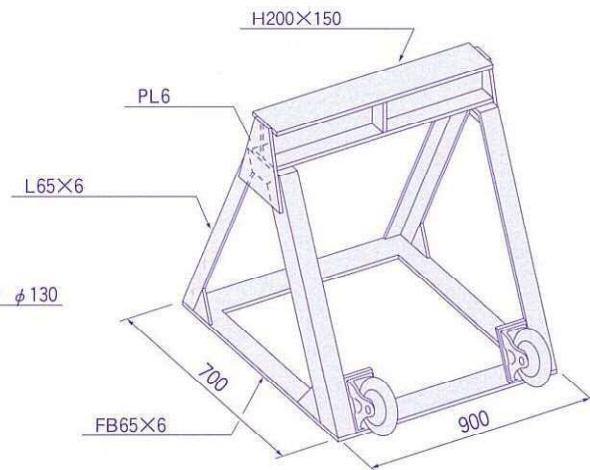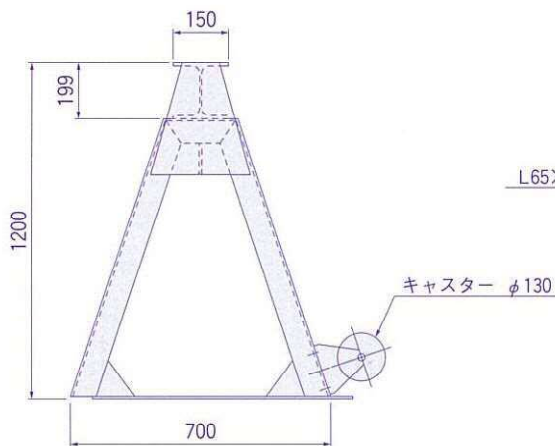

Attention in the use

- Install it in the flat place, and please use it definitely
- The iron footstool (with a wheel) catches the perpendicular power, and please avoid the use that the horizontal power increases.
- Please do not add load more than quantity of product self-respect to a wheel.
- At the time of movement, please use it with caution not to sandwich a foot and the hand.



綜建産業株式会社

東京 東京都台東区雷門1丁目16番4号
TEL (03) 3845-2497番
FAX (03) 3842-5834番

前橋 群馬県前橋市清野町160番地の3
TEL (027) 252-6644番
FAX (027) 251-7665番

大阪 大阪府大阪市北区豊崎3-4-14
TEL (06) 6372-8440番
FAX (06) 6372-8153番